


DECORATIVE ROLLED RUBBER FLOORING

VPI Decorative Rolled Rubber Flooring is as easy on the eye as it is to install. With an array of calming color tones and patterns, you can address the critical applications of sensitive medical spaces. And since there are fewer seams for bacteria and microbes to gather and grow, it's a perfect choice for healthcare facilities and daycare operations. From safety perspectives, we've got you covered:

- + Available in 2 mm and 3 mm gauges
- + 20 decorator colors
- + 1200 psi load resistance to handle more demanding applications
- + Comfortable to stand and walk on
- + Quiet, slip resistant, and durable
- + Tightly textured surface hides subfloor irregularities and helps reduce scuffing and scratching
- + 5' wide rolls reduce seams
- + Matching rubber weld beads
- + Contains no hazardous ingredients—no asbestos, cadmium, formaldehyde, CFC's and halogen
- + Longest warranty in the industry

Note: Due to color variations in printing, please refer to actual samples for accurate color.

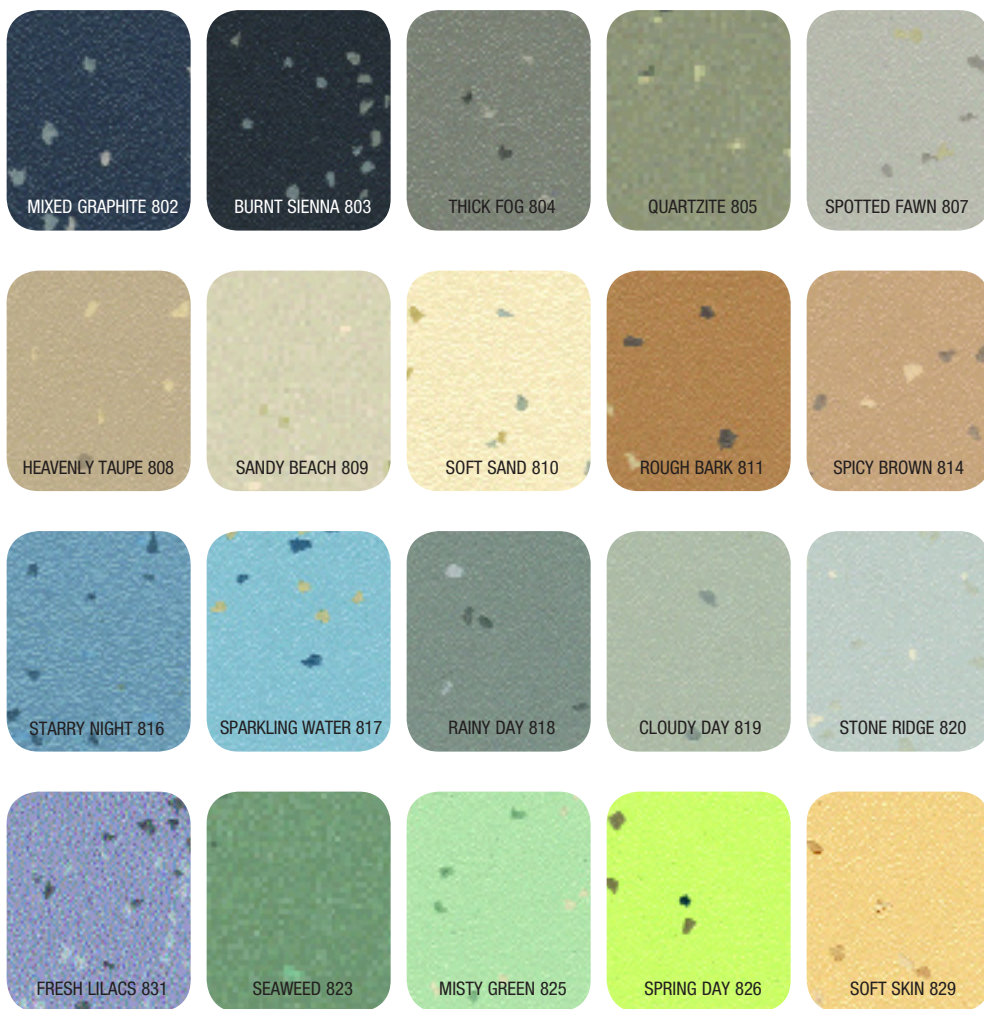

PERFORMANCE PROPERTIES

Gauge	0.080" 0.118"	2 mm 3 mm
Size	60" x 50' approx. (1.5 m x 15.2 m) roll	
Profiles & Colors	Paper textured look; 20 colors	
Recycled Content	Recycled post-manufacturing decorative chips	
ASTM F-1859 - Rubber Sheet Flooring W/O Backing	Complies - Type 1	
ASTM E-648 - Critical Radiant Flux CRF (W/cm2)	> 0.45 - Class 1	
ASTM E-662 - Smoke Density	≤ 450	
ASTM E-84 - Fire resistance (Steiner Tunnel)	Class 2	
ASTM D-3389 - Abrasion resistance	Exceeds Requirements	
ASTM F-970 - Static Load	Complies/Exceeds	
ASTM F-1515 - Light Aging	Complies	
ASTM F-1514 - Heat Aging	Complies	
ASTM D-2047 - Static Coefficient of Friction	Meets and Exceeds ADA Guidelines	
Limited Wear Warranty	10 years	
Maintenance	No Wax	

GENERAL

All VPI Decorative Rolled Rubber Flooring shown on the finish schedule, or otherwise listed here within, shall be furnished by VPI Corporation, 3123 South 9th Street, Sheboygan, WI 53081. All VPI Decorated Rolled Rubber Flooring shall comply with ASTM F-1859 and meet Class 1 Fire Rating Standards as tested to ASTM E-648/ASTM E-662 and ASTM E-84 Class 2. All VPI Decorative Rolled Rubber Flooring shall be 60" x 50' (1.5 m x 15.2 m) size and 0.080" (2.00 mm) and 0.118" (3.00 mm) thickness in the color(s) specified.

INSTALLATION & MAINTENANCE

All VPI Decorative Rolled Rubber Flooring must be installed in accordance with manufacturer's specifications, including subfloor preparation and recommended adhesive. Refer to "VPI Rubber Flooring Installation and Maintenance" for complete details. Copies can be obtained by calling 800-874-4240, at www.vpiflooring.com, or by writing: VPI Corporation, 3123 South 9th Street, P.O. Box 451, Sheboygan, WI 53082-0451.



VPI Corporation, 3123 South 9th Street, Sheboygan, WI 53081
vpiflooring.com 920-458-4664